

1310/1550 nm High Power Optical Circulator

Product Description

The 1310/1550 nm high power optical circulator is designed for high power applications. This non-reciprocal device redirects light at 1310/1550 nm wavelengths from port-to-port in only one direction while minimizing back reflection and back scattering in the reverse directions for any state of polarization. Employing Agiltron's advanced micro optics design, it features low insertion loss, low polarization sensitivity, high isolation, compact structure and high stability. The excellent characteristics of this product make it an ideal choice for application in fiber amplifier systems, pump laser diodes and optical fiber sensors. This circulator can be made using a variety of fibers including HI980, HI1060, LMA and double cladding fibers.



Features

- High Power Handling
- Low Insertion Loss
- Low PDL
- High Channel Isolation
- Compact Package
- High Reliability & Stability
- Cost Effective

Performance Specifications

High Power 1310/1550 Circulator		Specifications			Unit	
Operating Wavelength	1310	1295 ~ 1325			nm	
	C Band	1530 ~ 1570				
	L Band	1570 ~ 1610				
	C + L	1525 ~ 1610				
Type		3- Port		4-Port		
		1310	C, L	C + L	1310, C, L	nm
Insertion Loss*	Typical	0.6	0.7	0.7	dB	
	Maximum	0.9	1.0	1.0		
Isolation (2→1, 3→2, or 4→3)**		36	30	36	dB	
Directivity (1→3 or 2→4)		> 50			dB	
Polarization Dependent Loss		< 0.10		< 0.15	dB	
Polarization Mode Dispersion		< 0.1			ps	
Return Loss ¹		> 50			dB	
Optical Power Handling		< 5***			W	
Operating Temperature Range		0 ~ 70			°C	
Storage Temperature		-40 ~ 85			°C	
Fiber Type		Corning SMF-28				
Fiber Length		> 1			m	
Package Dimension		Φ5.5x 58.0(L)		Φ5.5x 65.0(L)	mm	

* Excluding connectors
 ** @λ_{op}, Top, SOP
 *** Continuous operation. for pulse operation call

Applications


- Optical Fiber Amplifier
- Metropolitan Area Network
- Fiber Optic Sensor
- Dispersion Compensation
- Test and Measurement
- Instrumentation




1310/1550 nm High Power Optical Circulator

Mechanical Dimensions (mm)

3-Port Circulator

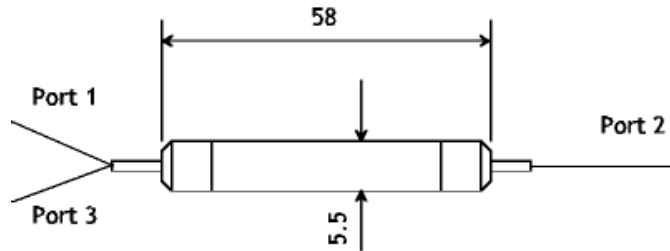

4-Port Circulator

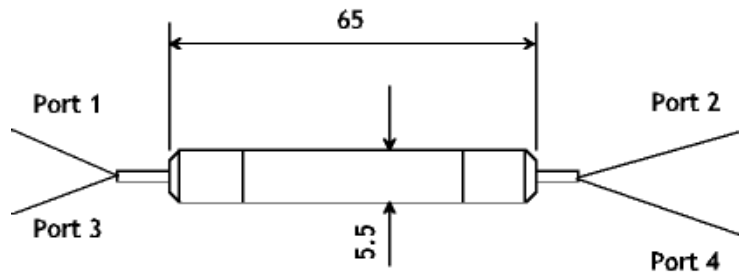

Ordering Information

OCHP	Type	Wavelength	Grade	Package Type	Fiber Type	Fiber Length	Connector Type
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	3 Port =30 4 Port=40 Special =00	1310 = 3 1550 = 5 C band = C L band = L C+L=2 Special = 0	Standard =1 Special = 2	5.5 x 58 =1 5.5 x 65=2 Special =0	SMF-28 =1 Special = 0 Bare fiber = 1 900um loose tube = 3 Special = 0	0.25m= 1 0.5 m = 2 1.0 m = 3 Special =0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC = 7 Special = 0

