




LightBend™ Quad 2x2 Bypass MultiMode Fiberoptic Switch

(Protected by U.S. patent 6823102 and pending patents)

Product Description

The LB Series Quad 2x2 Bypass multimode OptoMechanical Fiberoptic switch integrated 4 simultaneously activated 2x2 Bypass switches in a single compact format. The device connects optical channels by redirecting incoming optical signals into selected output fibers. This is achieved using a patented opto-mechanical configuration and activated via an electrical control signal. Latching operation preserves the selected optical path after the drive signal has been removed. The switch has integrated electrical position sensors. This novel design significantly reduces moving part position sensitivity, offering unprecedented high stability as well as an unmatched low cost.

We offer tight-bend-fiber version, which reduces the minimum bending radius from normal 15 mm to 7 mm. This feature enables smaller overall foot print.

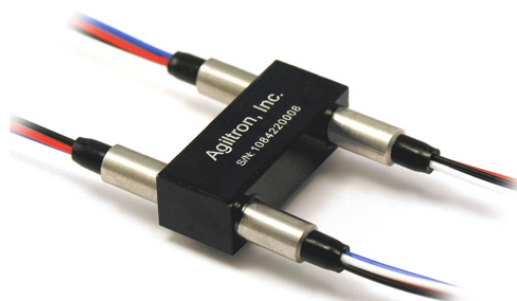

Features

- Low Optical Distortions
- High Reliability
- Fail-Safe Latching
- Epoxy-Free Optical Path

Performance Specifications

LB Quad 2x2 Bypass MM Switch	Min	Typical	Max	Unit
Operation Wavelength	850, 1310, 1410, 1550			nm
Insertion Loss * ~ **	0.6		1.1	dB
Wavelength Dependent Loss			0.30	dB
Return Loss * ~ **	35			dB
Cross Talk *	35			dB
Switching Time	3		10	ms
Repeatability			±0.02	dB
Durability	10 ⁷			Cycle
Operating Voltage	5	5	7	VDC
Operating Current	30		60	mA
Voltage Pulse Width (Latching)	20			mS
Switching Type	Latching/Non-Latching			
Operating Temperature	-5			°C
Optical Power Handling	300		500	mW
Storage Temperature	-40			°C
Package Dimension	28.0L x 27.0W x 8.0H			mm

* Insertion loss excludes connector.

** Light source CPR<14dB.


Applications

- Channel Blocking
- Configurable Add/Drop
- System Monitoring
- Instrumentation



LightBend™ Quad 2x2 Bypass MultiMode Fiberoptic Switch

Mechanical Dimensions (Unit:mm)

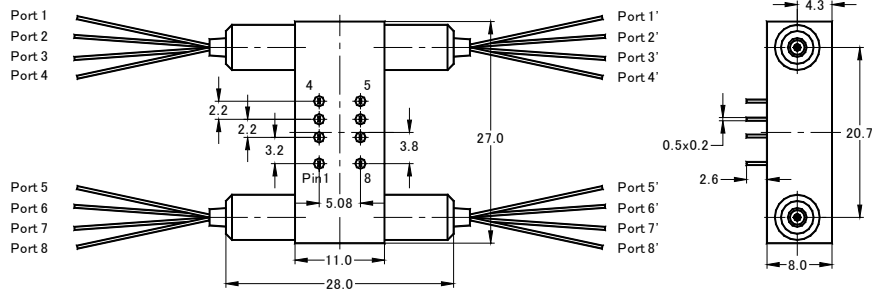

Electrical Driving Requirements

The load is a resistive coil which is activated by applying 5V (draw ~ 40mA). Applying too long pulse for the latching version will heat up the device. Agiltron offers a computer control kit with TTL and RS232 interfaces and Windows™ GUI


Latching Type

Optical Path	Electric Drive		Status Sensor			
	Pin 1	Pin 8	Pin 2-3	Pin 3-4	Pin 5-6	Pin 6-7
1→1', 2→2' 3→3', 4→4' 5→7', 6→8'	GND	5V Pulse	Close	Open	Open	Close
1→3', 2→4' 5→5', 6→6' 7→7', 8→8'	5V Pulse	GND	Open	Close	Close	Open

Non-Latching Type

Optical Path	Electric Drive		Status Sensor			
	Pin 1	Pin 8	Pin 2-3	Pin 3-4	Pin 5-6	Pin 6-7
1→1', 2→2' 3→3', 4→4' 5→7', 6→8'	No Power		Close	Open	Open	Close
1→3', 2→4' 5→5', 6→6' 7→7', 8→8'	5V	GND	Open	Close	Close	Open

Functional Diagram

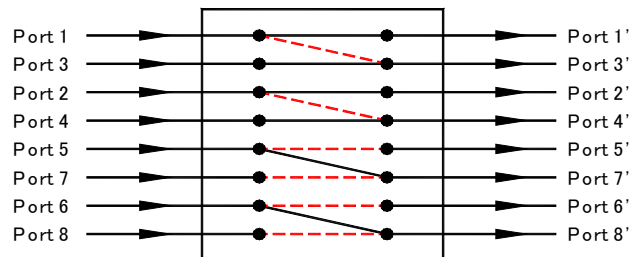

LB Quad 2x2 Bypass MM

Ordering Information

LBQB*-	Type	Wavelength	Switch	Package	Fiber Type	Fiber Length	Connector
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Quad 2x2=22 Special=00	1060=1 C+L=2 1310=3 1410=4 1550=5 650=6 780=7 850=8 1310 & 1550= 9 Special=0	Latching=1 Non-Latching=2 Special=0	Standard=1 Special=0	50/125=5 62.5/125=6 Special=0	Bare fiber=1 0.5m=2 1.0m=3 Special=0	None=1 FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC=7 Duplex LC=8 Special=0

* LB: Light Bend switch. Q: Quad. B: Bypass.

