

NanoSpeed™ 1x2 Solid-State Fiberoptic PM Switch

(Protected by U.S. patent 7,403,677B1 and pending patents)

Product Description

The NS Series 1x2 solid-state fiber optic PM switch connects optical channels by redirecting an incoming optical signal into a selected output optical fiber. This is achieved using patented non-mechanical configurations with solid-state all-crystal designs, which eliminates the need for mechanical movement and organic materials. The NS fiberoptic PM switch is designed to meet the most demanding switching requirements of ultra-high reliability, fast response time, and continuous switching operation.

The device can be driven by a cost effective circuit with 12V input voltage and a 0-5 V control signal



Performance Specifications

| NS Series 1x2 PM Switch | Min | Typical | Max | Unit |
|----------------------------|----------------|---------|-------|------|
| Operation Wavelength | 400 | | 1800 | nm |
| Insertion Loss | 0.4 | 0.6 | 1.0 | dB |
| IL Temperature Dependency | | 0.25 | 0.5 | dB |
| Cross Talk | 20 | 25 | 35 | dB |
| Extinction ratio | 18 | 25 | 30 | dB |
| Return Loss | 45 | 50 | 60 | dB |
| Response Time (Rise, Fall) | | | 300 | ns |
| Repetition Rate | DC | 5 | 300** | KHz |
| Operating Temperature | -5 | | 70 | °C |
| Optical Power Handling | | 300 | 500 | mW |
| Storage Temperature | -40 | | 85 | °C |
| Fiber Type | Panda PM fiber | | | |
| Package Dimension | 65.8x8.5x8.4 | | | mm |

* Driver kit is recommended.

** Special circuit

Features


- Solid-State high speed
- Ultra-high reliability
- Low insertion loss
- Compact size
- Low cost
- Simple driver
- Low power consumption

Applications



- Optical blocking
- Configurable light path
- Instrumentation

Nano Speed™ 1x2 Solid-State Fiberoptic PM Switch

Mechanical Dimensions (mm)

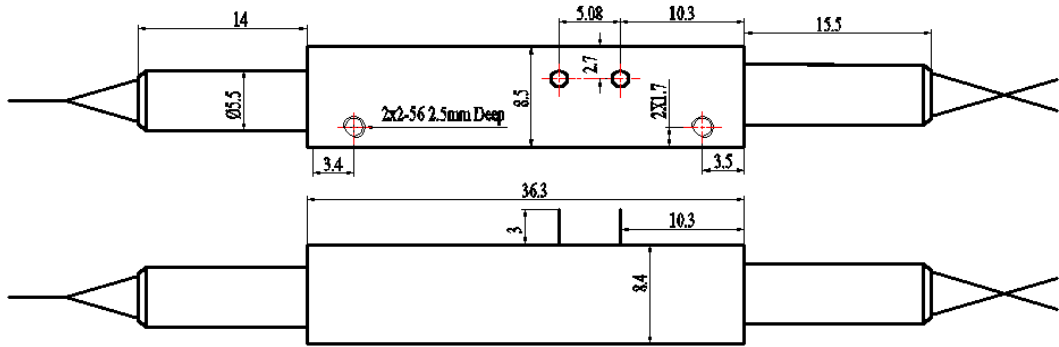


Speed and Repetition Measurement

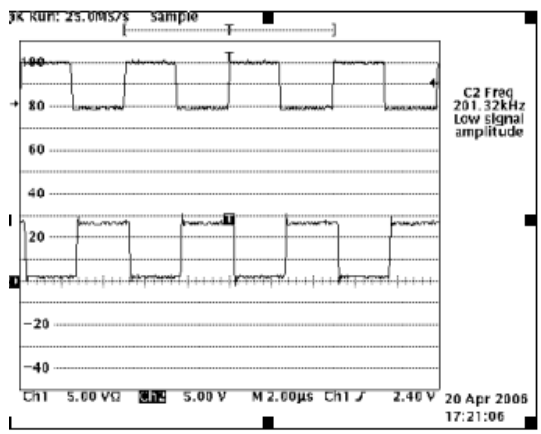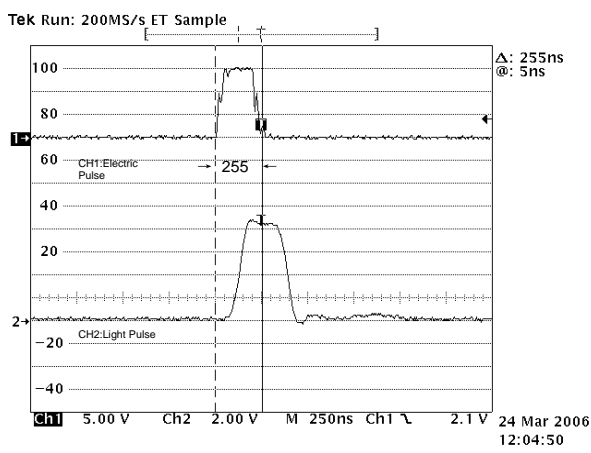

Nano Speed™ 1x2 Solid-State Fiberoptic PM Switch

Bandwidth Measurement

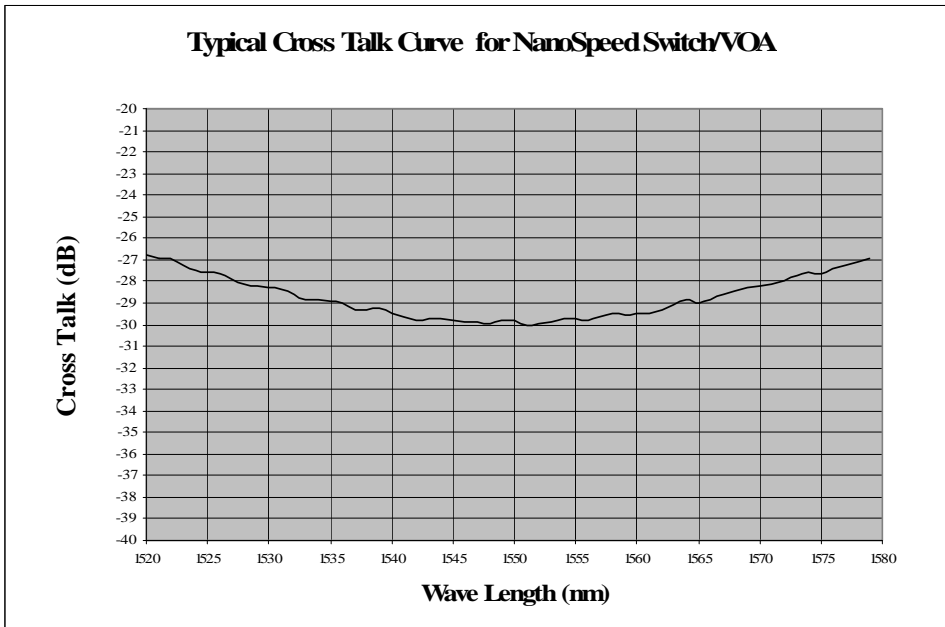

Ordering Information

| NSSW- | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 1 | 1 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|--------|---|--------------------------|--------------------------|---|---|---|---|--------------------------|--------------------------|
| Type | Wavelength | Configuration | Package | Fiber Type | | | Fiber Length | Connector | |
| 1X2=12 | 1060=1 L=2 1310=3 1410=4 1550=5 650=6 780=7 850=8 Special=0 | | | Panda PM fiber 400=4 Panda PM fiber 250=5 Special=0 | Bare fiber=1 900um loose tube=3 Special=0 | 0.25m=1 0.5m=2 1.0 m=3 Special=0 | None=1 FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC=7 Duplex LC=8 Special=0 | | |

*For 1060nm or short wavelength. Please refer to NS High Power 1x2 Switch.