


2-Micron ASE Light Source

Product Description

Agiltron 2-micron broadband Amplified Spontaneous Emission (ASE) light source features high output power, high output power stability, and excellent spectrum stability. This light source provides a broadband output spectrum in the range of 1870 - 2050nm. It has standard RS-232 electronics interface.

Performance Specifications

ASE Light Source	Min	Typical	Max	Unit
Wavelength	1870		2050	nm
Output Power	7/10			dBm
Bandwidth at 3dB		40		nm
Bandwidth at 10dB		80		nm
Output Stability			+/-5	%
Return Loss	25			dB
Power Supply		100-240		V
Operating Temperature	0		40	°C
Package Dimensions		200x350x180		mm
Fiber Pigtail		SMF28		

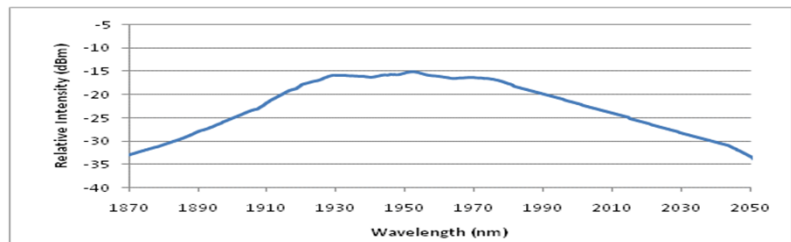

Ordering Information

SASE-	N I R	2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			Output Power	Electronics	Fiber Length	Connector
			7=7dBm 10=10dBm	R= RS-232	1m=1 2m=2 Special=0	FC/APC=1 Special=0

15 Presidential Way, Woburn, MA 01801 Tel: (781) 9351200 Fax: (781) 935-2040

www.agiltron.com

Features

- Wide Bandwidth (>65nm)
- High Output Power
- Excellent Power Stability
- Output Isolator

Applications

- Optical Component Testing
- Bi-medical Testing
- Optical Fiber Sensors
- Spectroscopy