



LightBend™ 1x4 Multimode OptoMechanical Fiberoptic Switch

(Protected by U.S. patent 6823102 and pending patents)

Product Description

The LB Series 1x4 multimode fiber optic switch connects optical channels by redirecting an incoming optical signal into a selected output fiber. This is achieved by using a patent pending opto-mechanical configuration activated via an electrical control signal. Latching operation preserves the selected optical path after the drive signal has been removed. The switch has integrated electrical position sensors, and the new material based advanced design significantly reduces moving part position sensitivity, offering unprecedented high stability as well as an unmatched low cost. Electronic driver is available for this series of switches.

We offer tight-bend-fiber version, which reduces the minimum bending radius from normal 15 mm to 7 mm. This feature enables smaller overall foot print.



Features

- Unmatched Low Cost
- Low Optical Distortions
- High Isolation
- High Reliability
- Epoxy-Free Optical Path

Performance Specifications

LB Series 1x4 MM Switch	Min	Typical	Max	Unit
Operation Wavelength	850 ± 30,	1260~1360,	1510~1610	nm
Insertion Loss ^{1,2}		0.5	0.9	dB
Wavelength Dependent Loss		0.2	0.3	dB
Polarization Dependent Loss		0.1	0.2	dB
Return Loss	35			dB
Cross Talk ¹	50			dB
Switching Time		3	10	ms
Repeatability			±0.05	dB
Operating Voltage	5	5	7	VDC
Operating Current ³	Latching		24	mA
	Non-Latching		34	
Voltage Pulse Width (Latching)		20		ms
Switching Type	Latching / Non-Latching			
Operating Temperature ⁴	-5		70	°C
Optical Power Handling		300	500	mW
Storage Temperature	-40		85	°C
Fiber Type	MM50/125, or MM62.5/125			
Package Dimension	54L x 31 W x 12H			mm

Note:

1. Measured using laser with coupled power ratio of categories 5 (CPR). Laser with larger mode fill ratio needs special version.
2. Exclude connectors, higher loss for Dual and Broad Band.
3. Tested at 5V DC for each coil actuation.
4. -40 °C to 85 °C is also available.

Applications

- Channel Blocking
- Configurable Add/Drop
- System Monitoring
- Instrumentation




Revision: 060-12
07-13-10

15 Cabot Road, Woburn, MA 01801 Tel: (781) 935-1200 Fax: (781) 935-2040

www.agiltron.com

LightBend™ 1x4 Multimode OptoMechanical Fiberoptic Switch

Non-Latching Type (Package Type 4)

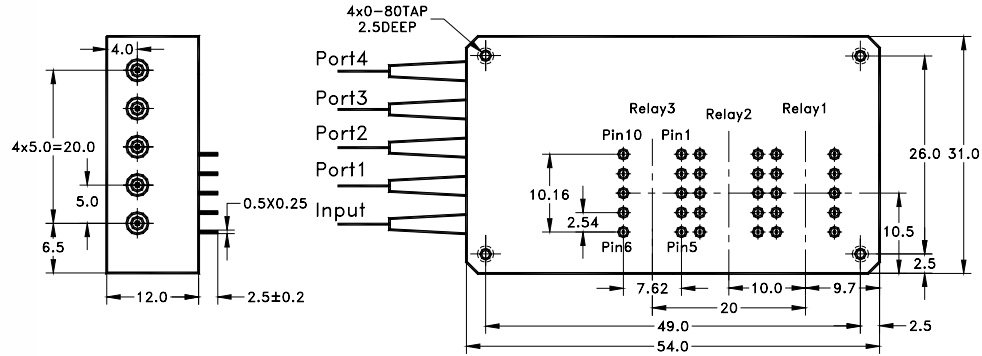

Ordering Information

LBSW-	Type	Wavelength	Switch	Package	Fiber Type	Fiber Length	Connector	
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	1x4=14 4x1=41 Special=00	1310=3 1410=4 1550=5 850 =8 Special=0	Latch=1 Non-latch=2	Latching=3 Non-Latching=4 Special=0	50/125=5 62.5/125=6 Tightbend=2 Special=0	Bare fiber=1 900m loose tube=3 Special=0	0.25m=1 0.5m=2 1.0m=3 Special=0	None=1 FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC=7 Duplex LC=8 Special=0

